
Chapter 10 - Options

June 1, 2001

Options allow you to customize how individual QVF workstations will operate. You can set certain default values to avoid having to make repetitive entries. You can also adjust where print will fall on card stock, and what size mailing labels you will use.

Default Registration Date

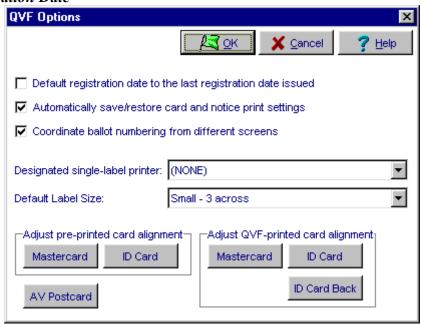

The <u>Default registration date to the last registration date issued</u> effects the *Voter Registration* screen. It might be useful if you are entering a large number of voter registrations into the QVF that have the same registration date. After you enter the first registration, the system will automatically enter the same registration date in all the other registrations you enter that day till you manually enter a different date.

Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The QVF Options screen is displayed.
Place a check mark next to <u>Default registration</u>	
date to the last registration date issued.	
Click on the [OK] button.	Your option is saved and you are returned to
	the QVF Main Desktop.

Automatically save/restore card and notice print settings

The options in the print card and notice screens are fairly standard. You can <u>Print Now</u> or <u>Print Later</u>. You can print a <u>Pre Printed Card</u> or a <u>QVF Printed Card</u>. The <u>Automatically save/restore card and notice print settings</u> option will retain the card print choices you previously made, and then apply them to future print screens.

Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The <i>QVF Options</i> screen is displayed.
Place a check mark next to <u>Automatically</u>	
save/restore card and notice print settings.	
Click on the [OK] button.	Your option is saved and you are returned to
	the QVF Main Desktop.

Coordinate ballot numbering from different screens

You are able to issue AV ballots from two different screens, the *AV Scan* screen and the *AV Applications and Ballots* screen. When this item is checked, the QVF keeps track of what ballot number was issued from either screen, and the correct next ballot number will populate the <u>Next Ballot Number field</u> in either screen.

Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The <i>QVF Options</i> screen is displayed.
Place a check mark next to Coordinate ballot	
numbering from different screens.	
Click on the [OK] button.	Your option is saved and you are returned to
	the QVF Main Desktop.

Designated single label printer

The QVF can print single mailing labels on sheets or you can install a single label printer. Once you have installed the single label printer you need to designate it as the single label printer for each work station that will be printing single labels.


Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The <i>QVF Options</i> screen is displayed.
From the drop down list in the <u>Designated</u>	Single labels generated with the <u>Print Now</u>
single-label printer field choose Dymo	option will be sent to the Dymo printer.
<u>Label/Writer EL 40</u> .	
If you want to use your main printer to print	Single labels generated with the <u>Print Now</u>
single labels on sheets, choose None or the	option will be sent to the main printer.
printer name in the <u>Designated single-label</u>	
<u>printer</u> field.	
Click on the [OK] button.	Your option is saved and you are returned to
	the QVF Main Desktop.

Default Label Size

The QVF will print sheet mailing labels in two formats; one for large labels, 1.33×4 in. and one for small labels, $1 \times 2.5/8$ in. You must designate in *Options* what size labels you want to use.

Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The <i>QVF Options</i> screen is displayed.
From the drop down list in the <u>Default Label</u>	
Size field choose the size labels you want to	
use, either <u>Large - 2 across</u> , or <u>Small - 3 across</u> .	
Click on the [OK] button.	Your option is saved and you are returned to
	the QVF Main Desktop.

Adjust Card Alignment

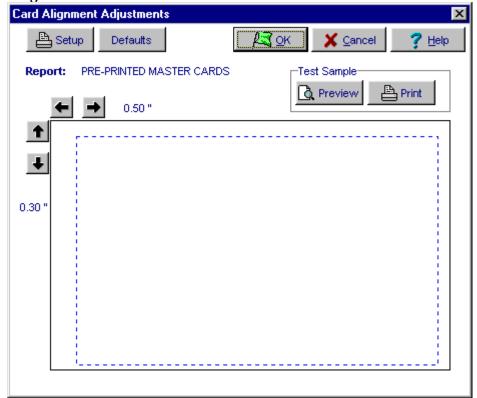


Because every laser printer is a little bit different, print jobs may vary from printer to printer. This can cause problems when trying to print on pre-printed stock, and in some cases, blank stock. To address this problem, the QVF allows you to make slight adjustments to the location of printed information on pre-printed or blank stock.

Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The <i>QVF Options</i> screen is displayed.
Choose to adjust either <u>Pre-Printed</u> or <u>QVF</u>	The Card Alignment Adjustments screen is
printed cards, then click on either the	displayed.
[Mastercard] or [ID Card] button	
Move the blue outlined box, this is where your	The blue outline box will move up, down left
information will print, by clicking on the [Left],	and right.
[Right], [Up] and [Down Arrow] buttons in	
the upper left part of the screen.	
Trial and error is the only way you can adjust	A test ID card is printed.
your card alignment. Once you have made what	
looks like the proper adjustment, click on the	
[Print] button	

If you want to start all over again with the	All alignment changes are erased, and the
original software settings, click on the	original software settings are restored.
[Defaults] button.	
When you have gotten the proper alignment for	You are returned to the QVF Options screen,
you cards, click on the [OK] button.	the system will save the card print location
	settings you just established.
Click on the [OK] button.	You are returned to the <i>QVF Main Desktop</i> .

Adjust Card Alignment - AV Post Cards

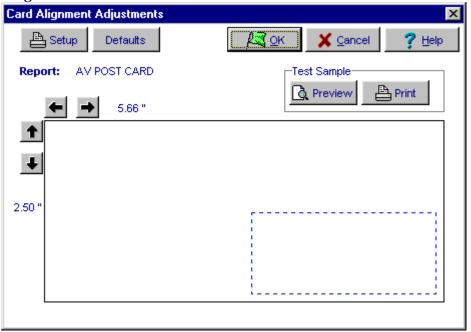

This feature allows you to make slight adjustments to where mailing information will print on the AV Post Card.

the 11 v 1 ost Cara.	
Action	Result
From <i>File</i> in the menu bar select <i>Options</i> .	The <i>QVF Options</i> screen is displayed.
In the lower left corner of the screen, click on	The Card Alignment Adjustments screen is
the [AV Post Card] button.	displayed.
Move the blue outlined box, this is where your	The blue outline box will move up, down left
information will print, by clicking on the [Left],	and right.
[Right], [Up] and [Down Arrow] buttons in	
the upper left part of the screen.	
Trial and error is the only way you can adjust	A test AV Post Card is printed.
your card alignment. Once you have made what	
looks like the proper adjustment, click on the	
[Print] button	

If you want to start all over again with the	All alignment changes are erased, and the
original software settings, click on the	original software settings are restored.
[Defaults] button.	
When you have gotten the proper alignment for	You are returned to the QVF Options screen,
you cards, click on the [OK] button.	the system will save the card print location
	settings you just established.
Click on the [OK] button.	You are returned to the <i>QVF Main Desktop</i> .